

INDUSTRIAL WEIGHING SOLUTION™

# CI-2001A/B

## Simple Indicator


CI-2001 series offers fast and accurate weighing and easy operating system. CI-2001 series is equipped with a bootloader, which enables firmware update through PC Software.



**NEW** CI-2001B  
LCD type



**NEW** CI-2001A  
LED type



Shielded Against Noise



RS-232C / RS-485 / USB

Various Communication Interface



RS-232C or USB

Firmware update through PC Software

Shielded Against Noise (RFI & EMI)

Various Communication Interface

Firmware update through PC Software

Scan with your smartphone  
to find more products



www.globalcas.com

# CI-2001A/B

## Simple Indicator



### FEATURE


- **Shielded against noise (RFI & EMI)**  
CI-2001 series is shielded against noises such as RFI and EMI, offering supreme stability in rough environmental conditions.



- **Firmware update through PC Software**  
CI-2001 series is equipped with a bootloader, which enables firmware update through PC Software.



- **Various Communication Interface**  
RS-232C(Standard) / RS-485, USB(Optional)

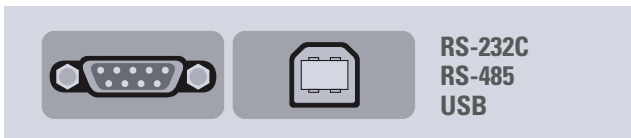

- Wall-mounted / Small Indicator
- Using Adapter
- Automatic weight set-up
- Watch-Dog circuitry (System restoration)
- Weight Back-up Saving of weight at sudden power failure
- Display type



CI-2001A LED type ▶



CI-2001B LCD type ▶

### APPLICATION

- Floor Scale / Platform Scale / Pallet Scale / Forklift Scale



### OPTION

- RS-485
- Inner Clock (Only for CI-2001B)
- USB
- Panel Guide

### SPECIFICATIONS

MODEL	CI-2001A	CI-2001B
Load cell excitation voltage	DC 5V	
Load cell connection (350 ohm)	4ea	
Zero adjust range	0.05mV ~ 5mV	
Input sensitivity	0.5 uV/D, 2 uV/D (OIML)	
A/D internal resolution	1/60,000	
A/D external resolution	1/30,000(Max.), 1/5,000(OIML)	
A/D conversion speed	10 times/sec	
Key	6 Function key	
Display	LED (6digit, Height : 14mm)	LCD (5digit, Height : 25mm)
Power	DC 12V adaptor	
Operating Temperature	-10°C ~ +40°C	
Product Size (mm)	185.6(W) × 58.8(D) × 84.7(H)	
Product Weight	Approx. 0.5kg	
Communication Interface	Standard	RS-232C
	Option	RS-485, USB

### DIMENSION

